

A close-up, high-angle shot of a motorcycle's headlight assembly. The headlight is a large, black, octagonal unit with a prominent, glowing white skull design in the center. The skull's eyes are the brightest part, emitting a strong white light. The surrounding motorcycle bodywork is dark, with some orange accents visible on the right side. The overall lighting is dramatic, with the headlight being the primary light source.

S
SUPER
SOCO

TS
STREET HUNTER

ELECTRIC MOBILITY



SUPER SOCO MAGIC AT ITS HIGHEST LEVEL


The two Polymer lithium battery **60V 32AH batteries** (the second optional) allow the TS Street Hunter to travel **up to 114 km**. The **fast charging** time is only 3 hours and 30 minutes for single battery.

10^{Ah}
Charging current

3.5^h
Charging Time
for single battery



More space for your travels with **improved load capacity** to make your journey **easier and more enjoyable**.

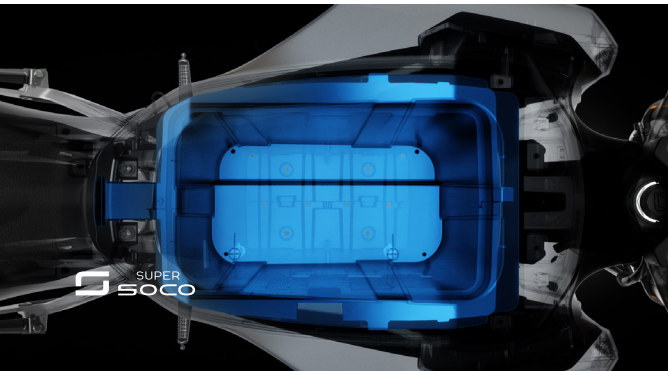

75^{Km/h}

2500^w

180^{Nm}



The **2500 W high-performance engine**, positioned in the wheel hub, guarantees a torque of 180 Nm, an incredible idea that only electric motors can give: the performance of excellence is in its DNA!




TWO WHEELS WITH SUPER POWERS

The **sporty lines** of this gritty two-wheeler reveal its nature as a sport bike inspired by the naked world, **perfect** to accompany you **on your working day or protagonist of your coolest nights**.

STAND OUT

The headlight inspires its design to the fangs of a predator and together with the rest of the light compartment, **entirely full LED**, ensures **maximum visibility** of the vehicle and the road in any weather or light.


75^{Km/h}
Max speed


3500^w
Peak power


114^{Km}
Range





Black



Storm Grey



Platinum White



Charcoal Blue

TECHNICAL INFORMATION

Homologation	L1e-B, L3e-A1 (comparable to a 50cc, 125cc.)		
Motor	SUPER SOCO	Weight	103 kg
Rated power	2500 W	L*W*H	2038 mm*780 mm*1085 mm
Maximum power	3500W	Wheelbase	1322 mm
Battery model	Polymer lithium battery	Ground Clearance	173 mm
Battery capacity	60V/32 Ah (optional with double batteries)	Seat Height (R point)	927 mm
Charging time	3.5 h	Rims	Fr. 2.15-17 Rr. 3.5-17
Charging power	600 W	Tyres	Fr. 100/80-17 Rr. 120/70-17
Autonomy	114 km* (double batteries)	Suspension	Hydraulic damping system
Max speed	L1e-B 45 km/h L3e-A1 75 km/h	Brakes	CBS
Climbing angle	14°	Colors	Black, Storm Grey, Platinum White, Charcoal Blue

*WMTC Stage 3

Warning: The photos and technical information in this catalogue may refer to prototypes subject to modifications during production and are purely for illustration and reference purposes, and are therefore not binding on Vmoto International. Vmoto cannot be held responsible for any print and/or translation errors. This catalogue is transnational and therefore some products may not be available and/or their features may vary in accordance with local laws. Not all colours and versions are available in each country. Vmoto reserves the right to make changes and improvements to any product without obligation of prior notice or to make such changes to products already sold. Further characteristics of the products are contained in the pertinent owner's manuals. The products represented are not definitive versions and are therefore subject to significant changes at Vmoto's discretion without prior notice. The photographs published in this catalogue show only professional riders under controlled street conditions. Do not attempt to imitate such riding behaviour as it could be dangerous for you or other people on the road. This catalogue, including but not limited to the trademarks, logos, texts, images, graphics and table of contents herein, constitute Vmoto intellectual property, or in any event Vmoto has the right to reproduce it; any reproduction, modification or other whole or partial use of the catalogue or its contents, including publication on the Internet without the prior written consent of Vmoto, is prohibited. Actual battery consumption may vary based on many factors, including but not limited to riding style, maintenance performed, weather conditions, surface characteristics, tyre pressure, load, weight of the rider and the passenger, accessories. The weights in running order are considered with all operating fluids, standard equipment and battery. For more information visit www.vmotosoco.com.

April 2023

Vmoto Limited

Level 48, 152-158 St Georges Terrace
Perth Western Australia 6000, Australia

Vmoto Soco International

15, Zhongxing East Road - Lishui Economic Development Zone
Lishui District, Nanjing 211200 - Jiangsu Province, China



Vmoto Europe

Boekweitstraat 95-97, 2153 GK
Nieuw Vennepe, The Netherlands



Official
Electric Scooter
Supplier

Vmoto Soco Italy

Viale Fratelli Casiraghi, 427
20099 S. San Giovanni
Milan District, Italy



Happiness is a journey

vmotosoco.com